




1. 总则

1.1 本柱状土墙支护工程适用于海创石化化工有限公司 PV 厂区 HPS

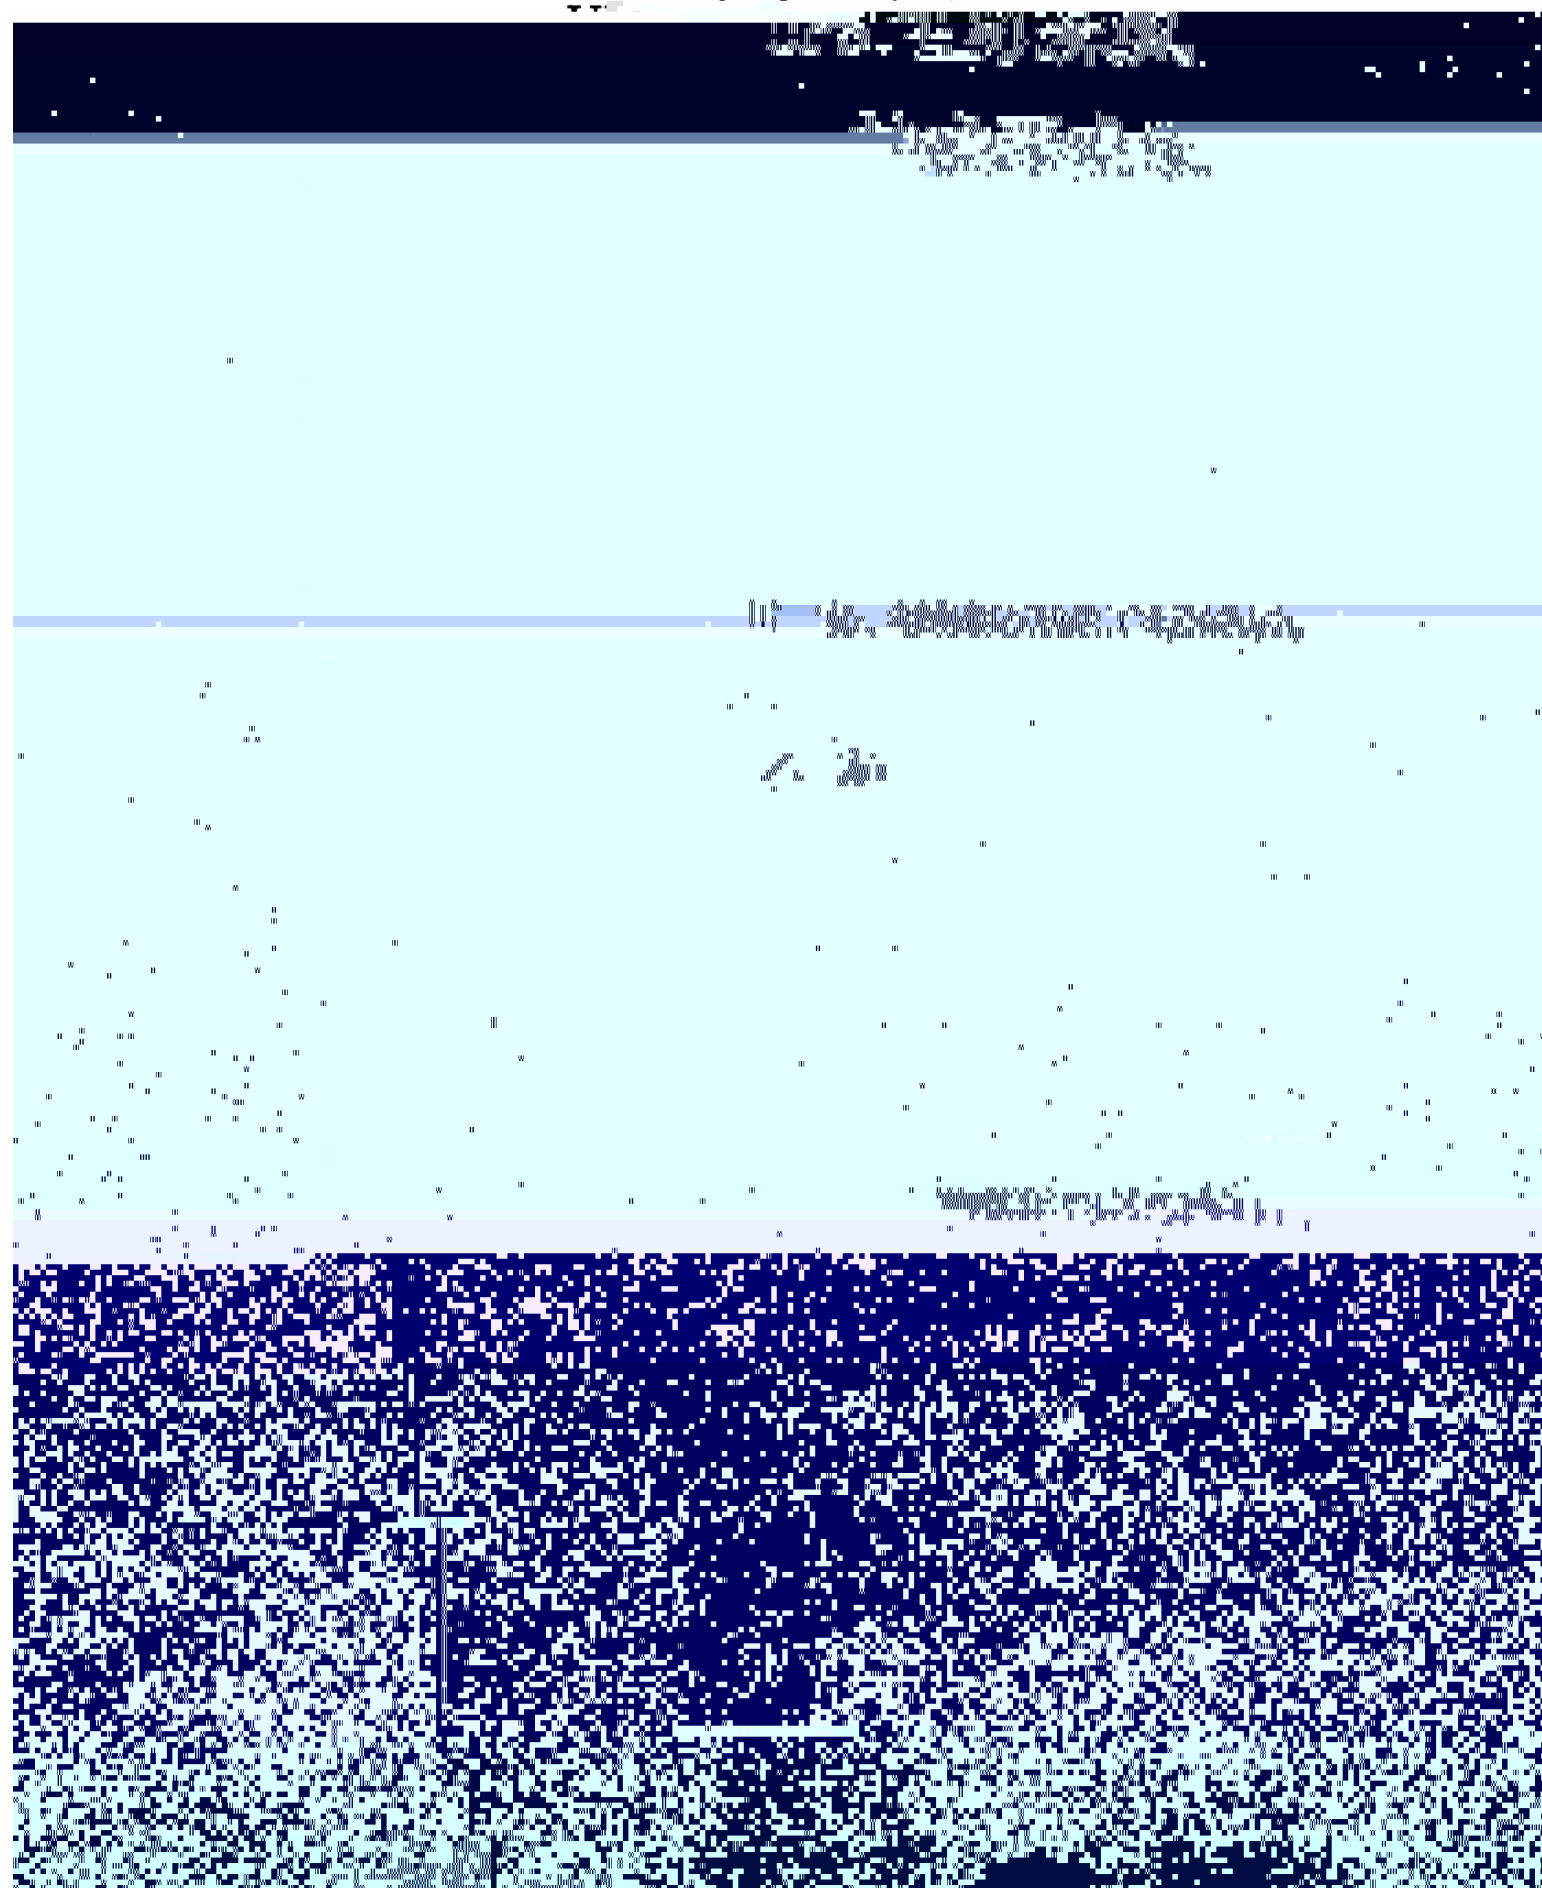

2.1 工程简介

地址：福建省泉州市丰泽区丰泽街 04 号 7 楼 701 室

列环境条件的考验，且没有损坏，可长期满容量连续运行。



1. *Journal of the American Medical Association*, 2000; 283: 2686-2692.



1000

3. 2. 2 设计控制

[illegible]

要求规范

GB/T3859.1 1993 半导体转换器基本

TEC61000

电磁兼容性

以下所列标准中,国家标准标准,行业标准,地方标准,企业标准

[illegible][illegible]

Figure 1. The effect of the number of trials on the number of correct responses. The number of correct responses was significantly higher than the number of incorrect responses in all cases. Error bars represent the standard error of the mean.

10/10/2017 11:53:23 AM

[illegible]

© 2004 Blackwell Publishing Ltd *Journal of Internal Medicine* 255: 111–118

DOI: 10.1002/for

130 WILFRED SPRUELL, JR.

[illegible][illegible]

The diagram illustrates the experimental setup. A participant is seated at a table, looking at a video screen. A video camera is positioned above the screen. A light source is positioned to the left of the screen. A target is positioned on the screen. A ruler is placed on the table. A scale bar is shown at the bottom right.

Figure 1. The effect of the concentration of the *Agrobacterium* suspension on the transformation efficiency of *Agrobacterium* strains. The *Agrobacterium* strains were grown in the YEA medium for 24 h at 28 °C. The cell concentration of the strains was adjusted to 10⁸ cells/ml. The cell suspension was mixed with the plant tissue and the mixture was incubated for 24 h at 28 °C. The plant tissue was then cultured on the selective medium. The transformation efficiency was calculated as the number of transformants per 100 mg of plant tissue. The data were presented as the mean ± SD of three independent experiments.

[illegible]

Figure 1. The effect of the number of iterations on the accuracy of the proposed algorithm. The accuracy of the proposed algorithm increases with the number of iterations. The accuracy of the proposed algorithm is 100% when the number of iterations is 1000.

1. *Journal of Management Studies*, 1990, 27, 1, 1-14.

[illegible][illegible]

10. *Journal of the American Medical Association*, 2000; 283: 2686-2692.

扫描全能王 扫描全能王 扫描全能王



保证在开关切换过程中不 (7) 静态开关应有控制和保护功能, 以
中断对负荷的供电。

(8) 风扇可不停机在线更换。



(16) 主机抗干扰等级: 10KV A, 100V L, 200V L, 10KV A, 100V L;

(17) 逆变过载能力, 在 110% 负荷时可运行 60 分钟;


(41) 在进线断路器故障情况下, 母联开关将自动切换至旁路供电

式:

(22) 当整流电源、旁路交流电源均失电, 负荷将调功逆变

电池组供电。

(23) 广链儿备件需求, 用以下品牌, 提开系统可靠性

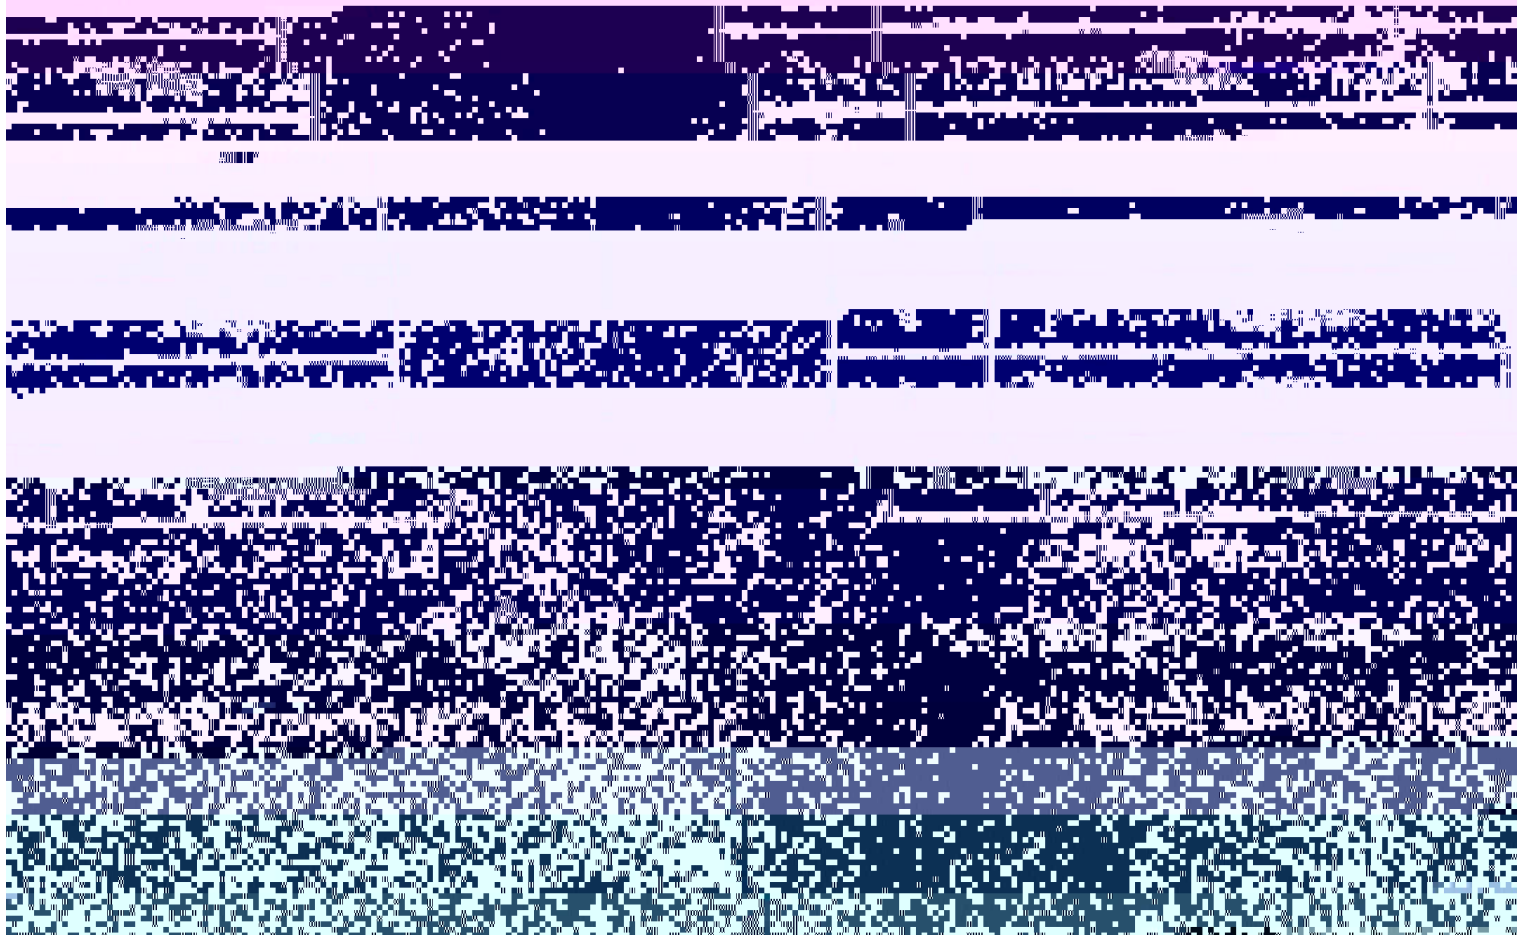

(24) 柜体尺寸需符合下表要求:

序号	主机容量	主机尺寸 mm (长*宽*高)	备注
----	------	-----------------	----

1 10000 410*800*2000 柜体高度尺寸

1. 侧视服务	10000	410*800*2000	柜体高度尺寸
---------	-------	--------------	--------

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务

1. 侧视服务




3.11 拉速与喂动力与功率、喂速与功率的关系


3.12 主机关键器件材料明细

序号	名称	型号	数量	单位
1	工控机		1	台
2	开关电源		1	台
3	工业级交换机		1	台
4	工业级路由器		1	台
5	工业级防火墙		1	台
6	工业级服务器		1	台
7	工业级存储设备		1	台
8	工业级网络设备		1	台
9	工业级安全设备		1	台
10	工业级监控设备		1	台

3.13 工控输出隔离变压器

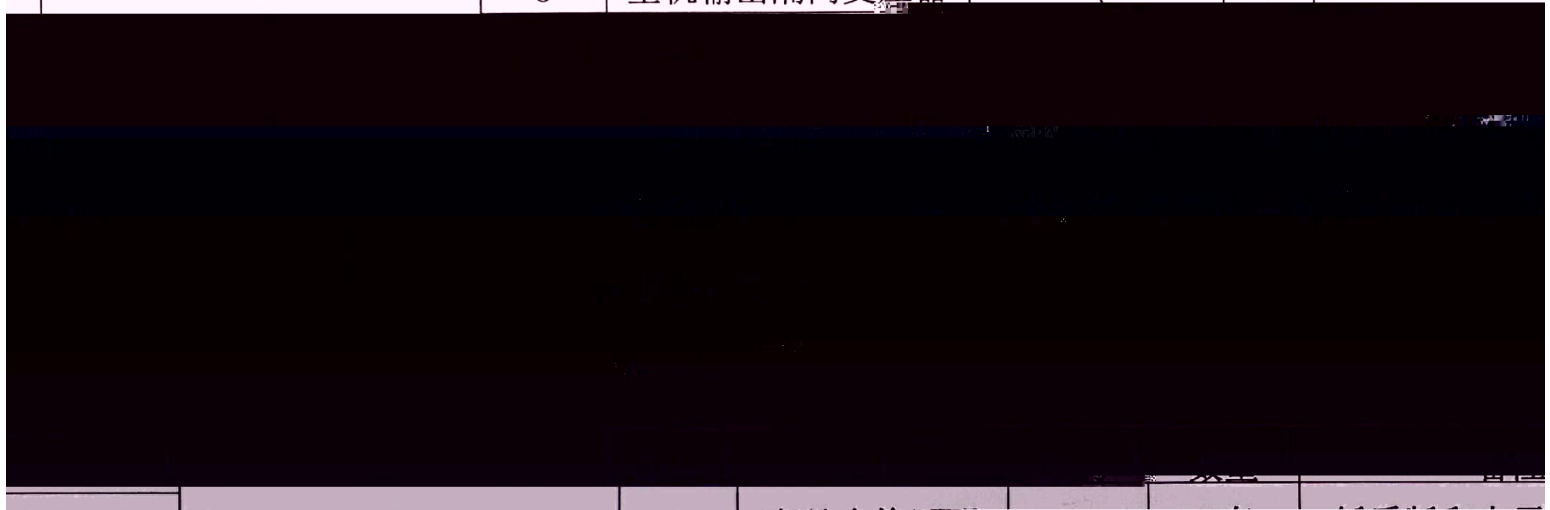

3.14 工控输入设备

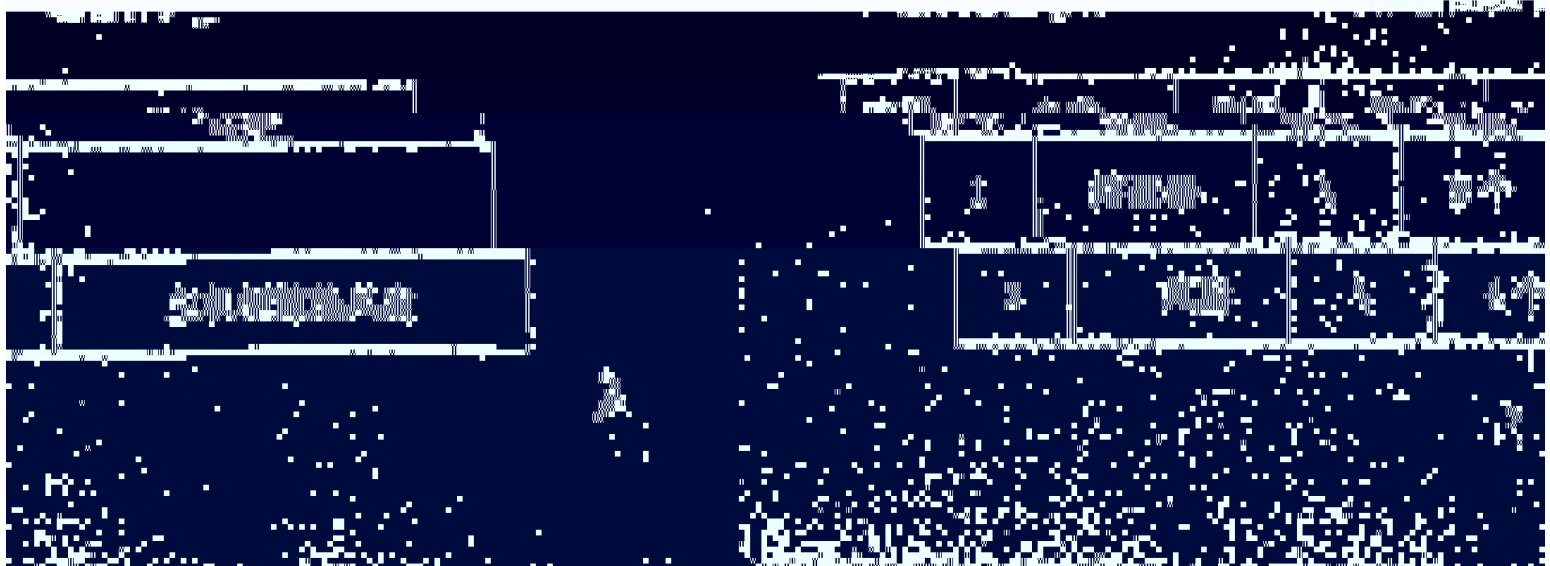

		4	整箱提供	1	3个				
		5	去底						

10. 技术偏差表

月	备注	序号	偏差项目	说明
		1		
		2		

审核人: 42.4.1 日期: 10.09.06 审核人: 42.4.1

审核人: 42.4.1 日期: 10.09.06 审核人: 42.4.1 审核人: 42.4.1

